



# marantz®

Value Electronics  
Authorized Dealer




## NR1200 MARANTZ NR1200 2CH SLIM STEREO RECEIVER

Indulge in high-resolution sonic perfection with the Marantz NR1200 two-channel slim stereo receiver that powers detailed, high-fidelity audio from a compact chassis. At half the height of a traditional receiver, the NR1200 drives impeccable sound for your movies, shows, Hi-Fi audio and more. The NR1200 supports the latest HDMI connectivity with its 5 inputs, each one supporting HDCP 2.3, 4K Ultra HD 60Hz video, HLG and more. Stream music from leading music services and control the NR1200 with voice control compatibility via Amazon Alexa, Google Assistant and Apple Siri.

### Highlights

- Slim profile that's half the height of a traditional AV receiver: Delivers exceptional performance and sound quality
- Two-channel discrete power amplifier with separate L/R power amp circuit and power transformer with 75W per channel (8-ohm, 20Hz – 20kHz, 0.08% THD)
- Engineered with dedicated Hi-Fi parts for two-channel Hi-Fi performance, including custom designed power capacitors, sound parts exquisitely tuned by sound masters and dual DAC circuit design
- 5 HDMI inputs with full HDCP 2.3 support plus one HDMI out with ARC support for single cable connection with your television
- Speaker A/B, tone control to tune sound to your exact specifications and dedicated dual subwoofer output for evenly dispersed bass, and no audible peaks or dips
- Integrate phono input with HDAM stage to easily connect your turntable
- Auto Low Latency Mode (ALLM) ensures Xbox One users have a more responsive and immersive gaming experience when connected with select TV models that also support ALLM
- Control the NR1200 with your TV remote, and HDMI-CEC support for seamless pass-through of picture and audio coding from your TV to the stereo receiver
- High-performance, high-resolution audio playback: Ability to decode high-resolution audio ALAC, FLAC and WAV lossless files up to 24-bit/192-kHz — plus, DSD 2.8MHz and 5.6MHz tracks for high-resolution listening
- HEOS Built-in: Enjoy more flexible music streaming in one room or many

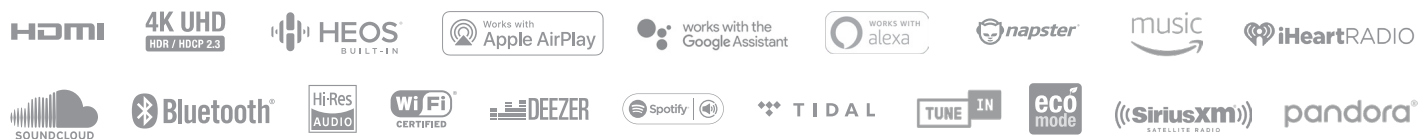

# because music matters

# marantz®

## NR1200

### MARANTZ NR1200 2CH SLIM STEREO RECEIVER



FEATURES	NR1200
<b>MULTICHANNEL SURROUND</b>	
Max Number of Processing (Preamp) Channels	2.1
<b>NETWORK</b>	
HEOS Multi-Room and Streaming / Network Audio Streaming	o / o
Lossy Formats: MP3 / WMA / AAC	o / o / o
Lossless Formats: FLAC / ALAC / WAV	o / o / o
FLAC HD 192/24 / WAV 192/24 / ALAC 192/24	o / o / o
DSD Audio Streaming	up to DSD5.6
Gapless Playback	o (FLAC, WAV, ALAC, DSD)
AirPlay2 Audio Streaming	o
Internet Radio (Tune In)	o (Tuneln)
Spotify Connect / Deezer / TIDAL / Napster / Pandora / SiriusXM	o / o / o / o / o / o
Compatible with Remote APP (iOS/Android)	Marantz 2016 AVR Remote
Ethernet / Wi-Fi	o / o (dual antenna/ dual band)
Bluetooth	o
<b>HDMI</b>	
4K 60Hz 4:4:4 resolution / HDCP 2.3	o / o
eARC (Enhanced Audio Return Channel)	ARC only
GUI Overlay on HDMI	o
HDR / HLG / Dolby Vision	o (HDR10) / o / -
3D Signal Pass-Through	o
HDMI Pass-Through in Standby Mode	o
<b>MULTIROOM / CI</b>	
HEOS Multi-Room Integrated	o
HEOS Link Compatibility: IR/ IP	o / o
IP Control / RS232 Control / Web Control / App Control	o / - / o / o
Domotz Pro / IHIJI compatible	o / o
<b>INPUTS/OUTPUTS</b>	
<b>VIDEO</b>	
HDMI In / Out	5 / 1
<b>AUDIO</b>	
Analog In / Out	3 / -
Phono (MM) In	o
Digital In: Optical / Coaxial	1 / 1
USB Audio / Made for iPod / Made for iPhone	o / - / -
Multichannel Pre Out	o (2.2)
Subwoofer Out	2

OTHER	
Speaker Terminal: Gold Plated Screw / Regular Screw	- / o
Speaker A / B	o
Front Inputs: Audio / Composite / Digital (Opt) / HDMI / USB	- / - / - / - / o
<b>OTHERS</b>	
FL Display	1 line
Graphic User Interface - GUI	Hybrid GUI
GUI Languages	3
Setup Assistant	o
Smart Select	o
Firmware Update by Network / USB	o / o
Variable Cross Over	o
Optimized Bass Redirection	o
ECO Mode	o
Auto Power Off	o
Sleep Timer	o
<b>SPECIFICATIONS</b>	
Number of Poweramps	2
Number of Speaker Terminals	4
Power Output (8 ohm, 20 Hz - 20 kHz, 0.08% 2ch Drive)	75 W
Power Output (6 ohm, 1 kHz, 0.7% 2ch Drive)	100 W
Power Output (6 ohm, 1 kHz, 10% 1ch Drive)	150 W
<b>GENERAL</b>	
System Remote Control	RC041SR
Power Consumption in W	180
Standby Consumption in W	0.2 (with CEC 0.5)
<b>Maximum Dimensions</b>	
Antenna Horizontal: W x D x H (mm)	17.3 x 14.9 x 4.1
Antenna Vertical: W x D x H (mm)	17.3 x 14.9 x 6.9
w/o Antenna: W x D x H (mm)	17.3 x 14.5 x 4.1
Weight (lbs)	18.1
<b>UPC</b>	
NR1200U1B	Black 699927251659

**Value Electronics**  
35 Popham Road  
Scarsdale, NY 10583  
Tel: 914-723-3344

www.valueelectronics.com



**Value Electronics**  
Authorized Dealer

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by D&M Holdings Inc. is under license. Dolby, Dolby Atmos, and the double-D symbol are trademarks of Dolby Laboratories. DTS, the Symbol, DTS in combination with the Symbol, DTS:X, and the DTS:X logo are registered trademarks or trademarks of DTS, Inc. in the United States and/or other countries. The Spotify software is subject to third party licenses found here: [www.spotify.com/connect/third-party-licenses](http://www.spotify.com/connect/third-party-licenses). Other trademarks and trade names are those of their respective owners. Marantz is a trademark or registered trademark of D&M Holdings, Inc.

\* All specs can be subject to change.